

TECHNICAL
INFORMATION


PREDICTIVE
MAINTENANCE
SYSTEMS

Gilchrist Technology, Inc.

GT0150 Series 5mm Proximity Probes

An improved version of GT0150 (GT0105) probe has been introduced as the standard 5mm (5mm) probe. With the new design, the probe has longer life cycle, and more durable. In addition, the up-graded extension cable, connector and the insulating material on the probe tip allows for optimum operation.

GT0150 (GT0105) probe comes with 0.5m and 1.0m standard cable. You can also order 5.0m and 9.0m with integrated probe and extension

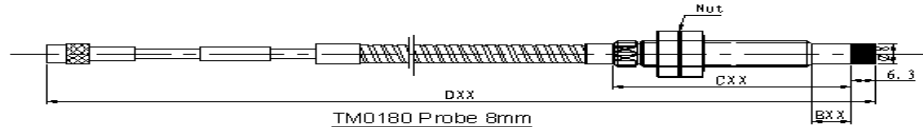

Extension Cable

GTI utilizes an up-graded extension cable for better system performance and life cycle. You can select various extension cable lengths based on the probe cable length. The total length of the probe and the extension cable can be either 5m or 9m.

Driver

The 3503/04 Series Transmitter acts as the primary driver for the TM0180 (GT0105). The insulation of the driver to ground is a standard feature for all the drivers. The total length of cable between the probe and the driver should be 5m or 9m. The distance between the driver and the monitor can be up to 300m (1000 ft). GTI recommends using a three wire shielded cable to connect the driver and/or monitoring system.

Hazardous Area

Please consult GTI or its office for further information.

GTI

Gilchrist Technology, Inc.,
1004 Turrentine, PO Box 509,
Gilchrist TX 77617-0509;
Phone (409) 286-5988
Fax (409) 286-2227
www.GilchristTechnology.com
email: sales@gilchristtechnology.com

System Specifications

Electrical

Power Supply:

Voltage: -23 ~ -30VDC

Current: < 12mA.

Linear Range:

2.0mm (80mils) begins at 0.25mm (10mils) from probe face (ANSI4140).

Range is 0.25 ~ 2.25mm (10 ~ 90 mils).

Sensitivity:

8.0 mV/um (200mV/mil) \pm 4% typical if calibrated as a system.

\pm 6.5% typical including interchangeability errors.

Temperature Sensitivity:

Probe and 5 meters cable. From 22 °C to 125 °C, tolerance is within \pm 0.3%/? . At 2.25mm (90mil), Typical \pm 0.5%/? .

Linearity (Deviation from straight line):

Within \pm 0.0254mm (\pm 1.0 mil) of a straight line, if calibrated as a system. \pm 0.038mm (\pm 1.5mil) typical including interchangeability errors.

Frequency Response (\pm 3db):

0 ~ 10.0kHz.

Minimum Target Size:

15mm (6 inch) in diameter.

Environmental

Driver Temperature:

Operation: -35°C ~ +85°C.

Probe and cable Temperature:

Operation: -35°C ~ +125°C.

Humidity:

100% non-condensing.


Physical

Driver Dimension: Height: 75mm (2.95").

Driver Mounting:

35mm DIN rail mounting or

Plate mounting.

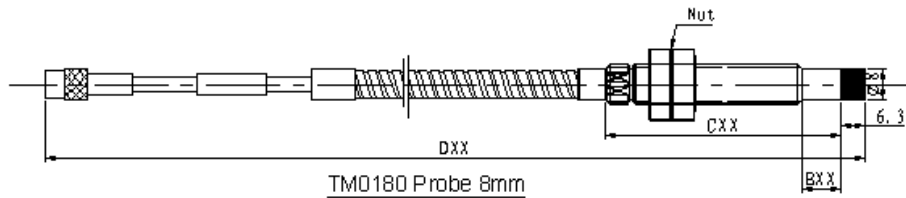

Ordering Grid

Order: 5mm probe

Standard configuration: GT0150-A07-B00-C05-D10

GT0150-AXX-BXX-CXX-DXX

AXX: Probe type

Typical: A01

A01*: 5mm probe, 3/8-24 UNF; without armor

A02: 5mm probe, 3/8-24 UNF; with armor

A07: 5mm probe, M10×1; without armor

A08: 5mm probe, M10×1; with armor

BXX: Unthreaded Length

Typical: B00

Order in increments of 0.4 inch (10mm) as one unit. Maximum length = CXX – 0.8 inch (20mm).

Example: BXX=B03. $0.4 \times 3 = 1.2$ inch or 30mm.

CXX: Overall Case Length

Typical: C05

Order in increments of 0.4 inch (10mm) as one unit.

Minimum length = 0.8 inch (20mm).

Maximum length = 9.8 inch (250mm).

Example: CXX=C05. $0.4 \times 5 = 2.0$ inch or 50mm.

DXX: Total Length

Typical: D10=1.0 meter (39 inches)

D05: 0.5 meter (20 inches)

D10: 1.0 meter (39 inches)

D50: 5.0 meter (200 inches)

D90: 9.0 meters (354 inches)